FRUNK.LY LTX

Model Y

Step by step, with photos

Scan the code with your phone camera.
Or open **frunk.ly/q/ltx-y-en**

This booklet is the short version.

In the box

- ☐ **A** 2 base frames, left and right, with hinges
- ☐ **B** 1 foldable tabletop, 70 × 40 cm
- ☐ **C** 2 support braces
- ☐ 1 bag with screws and tool
  - ☐ **D** 2 short screws with handle
  - ☐ **E** 2 long screws with handle and nut
  - ☐ **F** 1 double open-end wrench, 8 and 10 mm
  - ☐ **G** 1 Tesla-style keychain
- ☐ **H** 1 spare parts bag with 2 U-brackets

Parts

In the bag | Spare parts bag




A 2× | B 1× | C 2× | D 2× | E 2× | F 1× | G 1× | H 2×

Installation · Base frames

1 Empty the frunk completely.

2 There are two screws in the floor of the frunk. Loosen them with the wrench (F, 10 mm end), counterclockwise, and take them out. Keep them safe: they go back in once the base frames are removed.



3 Place the left base frame (A) in the frunk so that its hole sits over the hole in the floor.


4 Fix it with a short screw with handle (D).

⚠ **Hand tight only.**

5 Repeat steps 3 and 4 with the right base frame.


6 Remove the transport locks from the hinges and fold the hinges out one by one.

7 Push the two support braces (C) onto the base frames, one at the front and one at the back. They sit between the frames and make the table stiffer.




Installation · Tabletop

8 Hold the tabletop (B) so that the arrow on the sticker points to the windshield. Lay it on the hinges and line up the holes on its underside with the holes on top of the hinges.

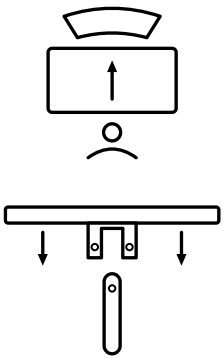

9 Take the nuts off the long screws (E). Push one screw through all the holes on each side and screw the nut back on.

⚠ **Don't tighten it, or the tabletop will no longer fold.**



Done.

Removal

Work in reverse order, then screw the two original screws back into the frunk floor.

⚠ **Don't overtighten.**

Everyday use

Unfold: Open the frunk. Take the tabletop by its left and right sides and pull it up and towards you. The hinges fold up with it. For more room, fold the upper part backwards onto the rubber lip at the back of the frunk.

Fold away: First fold the upper part forward onto the tabletop again. Then take the tabletop by its left and right sides. Push it back towards the windshield; it lowers as the hinges fold in. Guide it down until it lies flat, then close the frunk.

Storage underneath: The frunk stays usable with the table fitted. Take the folded tabletop by its back edge, towards the windshield, which is also where the latch sits. Tilt it towards you: it then hangs open towards the front of the car, and you reach past it into the frunk.

⚠ Safety information

Load: The table holds up to 10 kg, evenly distributed. Do not sit on it, lean on it or pull yourself up on it.

After a knock: If you bump the tabletop, check that it is still secure.

Cargo: The driver is responsible for the load and for securing it. The base frames are fixed in the frunk with the screws with handle; the tabletop's shape keeps it from sliding.

Pinching: Fingers can get caught when the hinges fold open or shut. Mind your hands.

Spare parts bag: If one of the two U-brackets under the tabletop breaks, swap it for a spare. It is held by 4 Torx screws.

Questions or spare parts? support@frunk.ly

Manufacturer: Frunkly · Peter Amelang
Narzissenweg 14, 22047 Hamburg, Germany
support@frunk.ly · frunk.ly

LTX · Model Y · EN · Version 10/2026